


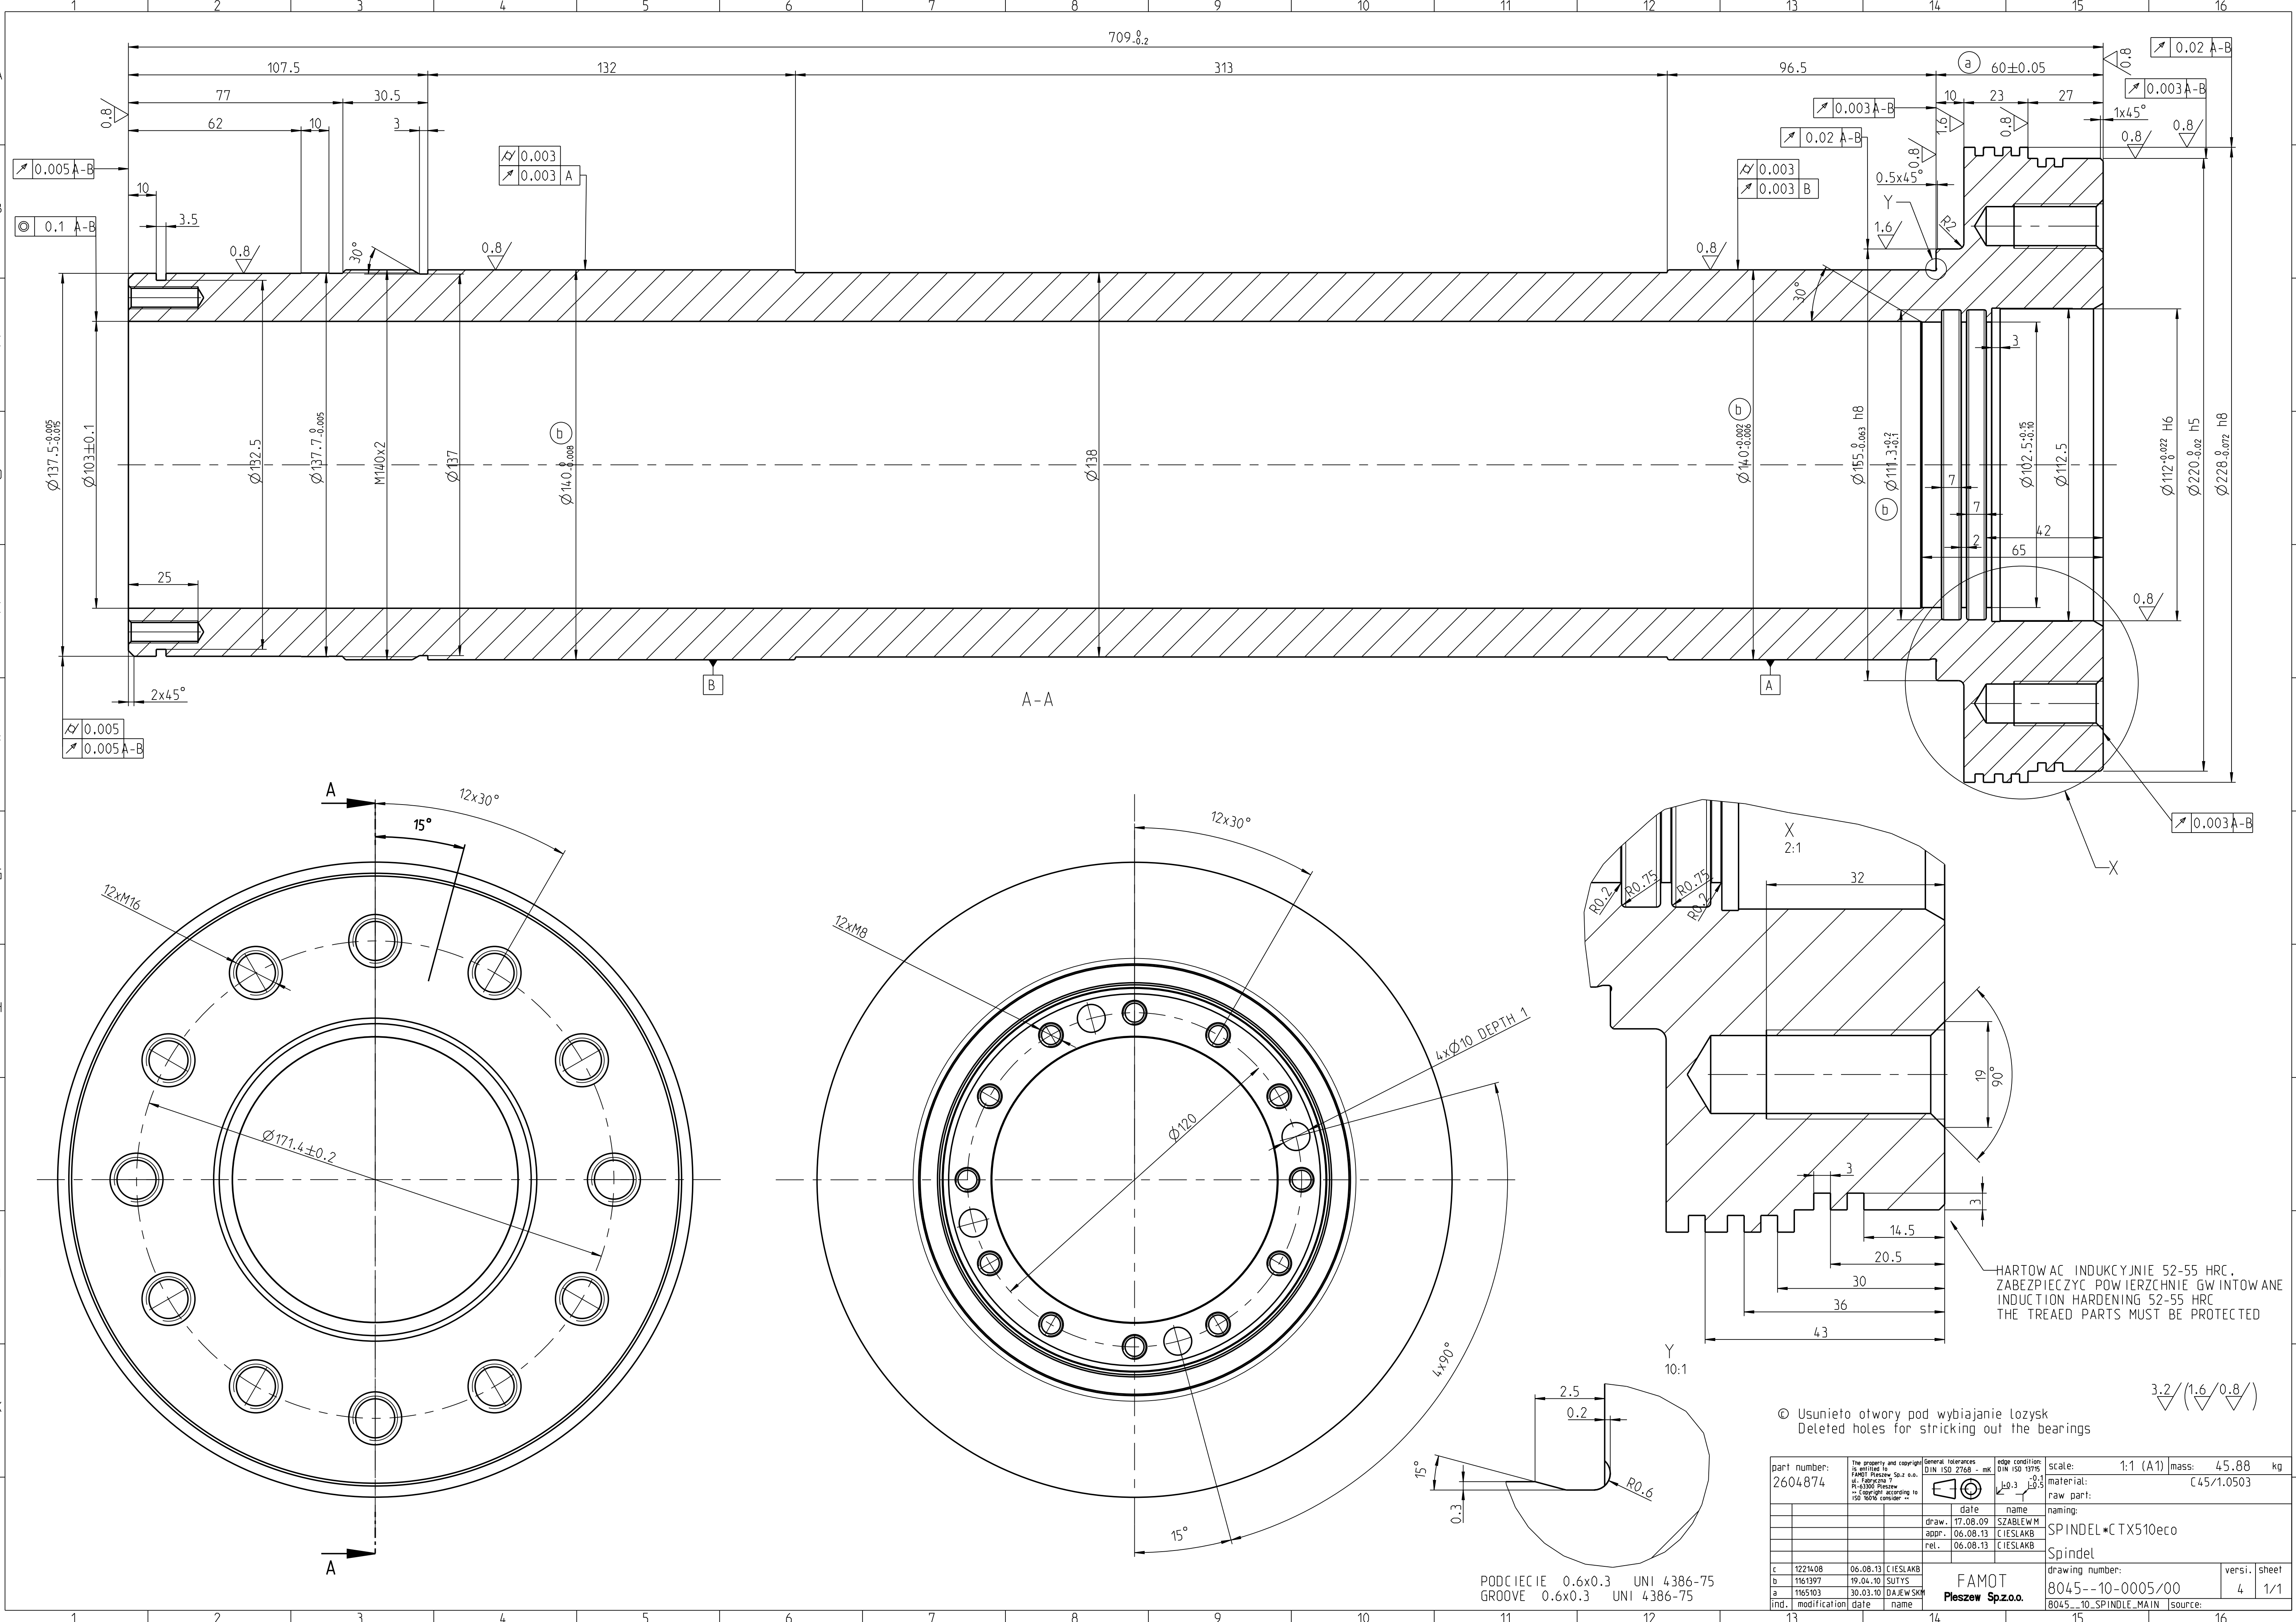

Usunięto otwory pod wybijanie łożysk
Deleted holes for striking out the bearings

part number: 2604874		The property and copyright is entitled to FAMOT Pleszew Sp. z o.o. ul. Fabryczna 7 64-300 Pleszew ** copyright according to ISO 9001 consider **		General tolerances DIN ISO 2768 - mK		edge condition: DIN ISO 13715 k0.3 k0.5		scale: 1:1 (A1)		mass: 45.88 kg	
								material: C45/1.0503			
								raw part:			
								naming:			
								SPINDEL*CTX510eco			
								Spindel			
c 1221408		06.08.13		CIESLAKB				drawing number:		versi. sheet	
b 1161397		19.04.10		SUTYS				8045--10-0005/00		4 1/1	
a 1165103		30.03.10		DAJEWSKI				8045--10-SPINDLE_MAIN		Source:	
ind. modification		date		name							

PODCIECIE 0.6x0.3 UNI 4386-75
GROOVE 0.6x0.3 UNI 4386-75

HARTOWAC INDUKCYJNIE 52-55 HRC.
ZABEZPIECZYĆ POWIERZCHNIE GWINTOWANE
INDUCTION HARDENING 52-55 HRC
THE TREADED PARTS MUST BE PROTECTED

3.2 / (1.6 / 0.8 /)